

Part Number:

Huawei Compatible 34060360



## PRODUCT DESCRIPTION

SFP-1.25G-1550nm-80km-SM-LC-DDM Small Form Factor Pluggable (SFP) transceivers are compatible with the Small Form Factor Pluggable Multi-Sourcing Agreement (MSA). The transceiver consists of four sections: the LD driver, the limiting amplifier, the DFB laser and the PIN photo-detector. The module data link up to 80KM in 9/125um single mode fiber. The optical output can be disabled by a TTL logic high-level input of Tx Disable. Tx Fault is provided to indicate that degradation of the laser. Loss of signal (LOS) output is provided to indicate the loss of an input optical signal of receiver or the link status with partner.

## Ordering information

| Product part Number             | Data Rate (Mbps) | Media             | Wavelength (nm) | Transmission Distance(km) | Temperature Range (Tcase) (°C) |            |
|---------------------------------|------------------|-------------------|-----------------|---------------------------|--------------------------------|------------|
|                                 |                  |                   |                 |                           |                                |            |
| SFP-1.25G-1550nm-80km-SM-LC-DDM | 1250             | Single mode fiber | 1550            | 80                        | 0~70                           | commercial |
| SFP-1.25G-1550nm-80km-SM-LC-DDM | 1250             | Single mode fiber | 1550            | 80                        | -10~80                         | extended   |
| SFP-1.25G-1550nm-80km-SM-LC-DDM | 1250             | Single mode fiber | 1550            | 80                        | -40~85                         | industrial |

## PRODUCT FEATURES

- Up to 1.25Gb/s data links
- DFB laser transmitter and PIN photo-detector
- Up to 80km on 9/125µm SMF
- Hot-pluggable SFP footprint
- Duplex LC/UPC type pluggable optical interface
- Low power dissipation
- Metal enclosure, for lower EMI
- RoHS compliant and lead-free
- Single +3.3V power supply
- Compliant with SFF-8472
- Case operating temperature

Commercial: 0°C to +70°C

Extended: -10°C to +80°C

Industrial: -40°C to +85°C

## APPLICATIONS

- Switch to Switch Interface
- Gigabit Ethernet
- Switched Backplane Applications
- Router/Server Interface
- Other Optical Links

## Absolute Maximum Ratings


| Parameter                 | Symbol | Min. | Typ. | Max.    | Unit | Note |
|---------------------------|--------|------|------|---------|------|------|
| Storage Temperature       | Ts     | -40  |      | 85      | °C   |      |
| Relative Humidity         | RH     | 5    |      | 95      | %    |      |
| Power Supply Voltage      | VCC    | -0.5 |      | 4       | V    |      |
| Signal Input Voltage      |        | -0.3 |      | Vcc+0.3 | V    |      |
| Receiver Damage Threshold |        | 5    |      |         | dBm  |      |

## Recommended Operating Conditions

| Parameter                    | Symbol | Min.              | Typ.      | Max. | Unit  | Note                            |             |
|------------------------------|--------|-------------------|-----------|------|-------|---------------------------------|-------------|
| Case Operating Temperature   | Tcase  | 0                 |           | 70   | °C    | SFP-1.25G-1550nm-80km-SM-LC-DDM |             |
|                              |        | -10               |           | 80   |       | SFP-1.25G-1550nm-80km-SM-LC-DDM |             |
|                              |        | -40               |           | 85   |       | SFP-1.25G-1550nm-80km-SM-LC-DDM |             |
| Power Supply Voltage         | VCC    | 3.13              | 3.3       | 3.47 | V     |                                 |             |
| Power Supply Current         | ICC    |                   |           | 300  | mA    |                                 |             |
| Power Supply Noise Rejection |        |                   |           | 100  | mVp-p | 100Hz to 1MHz                   |             |
| Data Rate                    |        |                   | 1250/1250 |      | Mbps  | TX Rate/RX Rate                 |             |
| Transmission Distance        |        |                   |           | 80   | KM    |                                 |             |
| Coupled Fiber                |        | Single mode fiber |           |      |       |                                 | 9/125um SMF |

## Specification of Transmitter


| Parameter                         | Symbol  | Min. | Typ. | Max. | Unit | Note      |
|-----------------------------------|---|------|------|------|------|-----------|
| Average Output Power              | P <sub>OUT</sub>                                  | 0    |      | 5    | dBm  | Note (1)  |
| Extinction Ratio                  | ER  | 9    |      |      | dB   |           |
| Center Wavelength                 | $\lambda_c$                                       | 1530 | 1550 | 1570 | nm   | DFB Laser |
| Side Mode Suppression Ratio       | SMSR  | 30   |      |      | dB   |           |
| Spectrum Bandwidth(-20dB)         | $\sigma$  |      |      | 1    | nm   |           |
| Transmitter OFF Output Power      | P <sub>off</sub>                                  |      |      | -45  | dBm  |           |
| Differential Line Input Impedance | RIN   | 90   | 100  | 110  | Ohm  |           |
| Output Eye Mask                   | Compliant with IEEE802.3 z (class 1 laser safety) |      |      |      |      | Note (2)  |

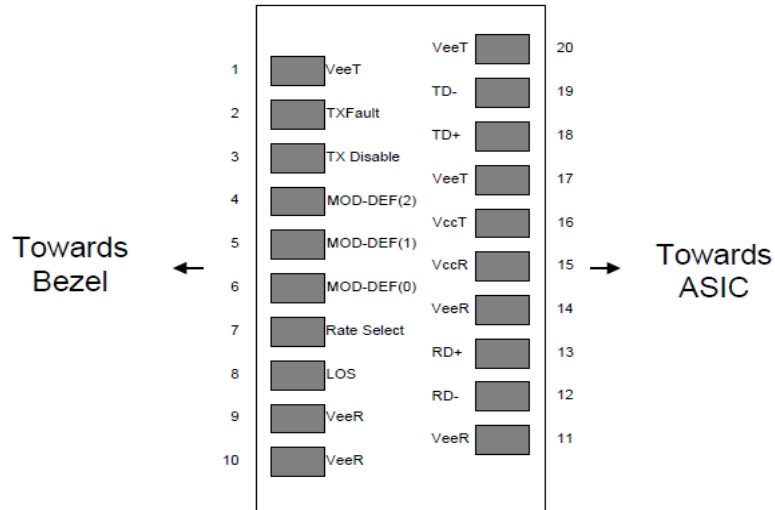

**Figure2. Pin out of Connector Block on Host Board**

## Pin Descriptions

| Pin | Symbol             | Name/Description   | NOTE |
|-----|--------------------|--|------|
| 1   | V <sub>EET</sub>   | Transmitter Ground (Common with Receiver Ground)               | 1    |
| 2   | T <sub>FAULT</sub> | Transmitter Fault.   |      |
| 3   | T <sub>DIS</sub>   | Transmitter Disable. Laser output disabled on high or open.    | 2    |
| 4   | MOD_DEF(2)         | Module Definition 2. Data line for Serial ID.                  | 3    |
| 5   | MOD_DEF(1)         | Module Definition 1. Clock line for Serial ID.                 | 3    |
| 6   | MOD_DEF(0)         | Module Definition 0. Grounded within the module.               | 3    |
| 7   | Rate Select        | No connection required   | 4    |
| 8   | LOS                | Loss of Signal indication. Logic 0 indicates normal operation. | 5    |
| 9   | V <sub>EER</sub>   | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 10  | V <sub>EER</sub>   | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 11  | V <sub>EER</sub>   | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 12  | RD-                | Receiver Inverted DATA out. AC Coupled                         |      |
| 13  | RD+                | Receiver Non-inverted DATA out. AC Coupled                     |      |
| 14  | V <sub>EER</sub>   | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 15  | V <sub>CCR</sub>   | Receiver Power Supply  |      |
| 16  | V <sub>CCT</sub>   | Transmitter Power Supply                                       |      |
| 17  | V <sub>EET</sub>   | Transmitter Ground (Common with Receiver Ground)               | 1    |
| 18  | TD+                | Transmitter Non-Inverted DATA in. AC Coupled.                  |      |
| 19  | TD-                | Transmitter Inverted DATA in. AC Coupled.                      |      |
| 20  | V <sub>EET</sub>   | Transmitter Ground (Common with Receiver Ground)               | 1    |

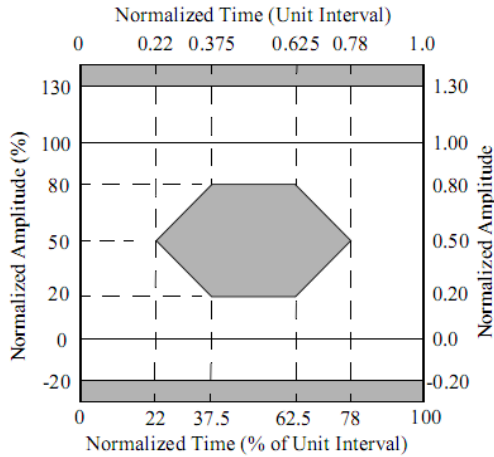

## Specification of Receiver

| Parameter                         | Symbol         | Min. | Typ. | Max. | Unit | Note     |
|-----------------------------------|----------------|------|------|------|------|----------|
| Input Optical Wavelength          | $\lambda_{IN}$ | 1270 |      | 1610 | nm   | PIN-TIA  |
| Receiver Sensitivity              | $P_{IN}$       |      |      | -26  | dBm  | Note (1) |
| Input Saturation Power (Overload) | $P_{SAT}$      | -3   |      |      | dBm  |          |
| Los Of Signal Assert              | $P_A$          |      |      | -26  | dBm  |          |
| Los Of Signal De-assert           | $P_D$          | -38  |      |      | dBm  | Note (2) |
| LOS Hysteresis                    | $P_A-P_D$      | 0.5  | 2    | 6    | dB   |          |

Note (1): Measured with Light source 1550nm, ER=9dB; BER =  $<10^{-12}$  @PRBS=2<sup>7</sup>-1 NRZ


Note (2): When LOS de-asserted, the RX data+/- output is High-level (fixed)

## Electrical Interface Characteristics


| Parameter                      | Symbol     | Min. | Typ. | Max.         | Unit | Note     |
|--------------------------------|------------|------|------|--------------|------|----------|
| <b>Transmitter</b>             |            |      |      |              |      |          |
| Total Supply Current           | $I_{CC}$   |      |      | A            | mA   | Note (1) |
| Transmitter Disable Input-High | $V_{DISH}$ | 2    |      | $V_{CC}+0.3$ | V    |          |
| Transmitter Disable Input-Low  | $V_{DISL}$ | 0    |      | 0.8          | V    |          |
| Transmitter Fault Input-High   | $V_{TxFH}$ | 2    |      | $V_{CC}+0.3$ | V    |          |
| Transmitter Fault Input-Low    | $V_{TxFL}$ | 0    |      | 0.8          | V    |          |
| <b>Receiver</b>                |            |      |      |              |      |          |
| Total Supply Current           | $I_{CC}$   |      |      | B            | mA   | Note (1) |
| LOSS Output Voltage-High       | $V_{LOSH}$ | 2    |      | $V_{CC}+0.3$ | V    | LVTTL    |
| LOSS Output Voltage-Low        | $V_{LOSL}$ | 0    |      | 0.8          | V    |          |

Note (1): A (TX) + B (RX) = 300mA (Not include termination circuit)

## Recommend Circuit Schematic

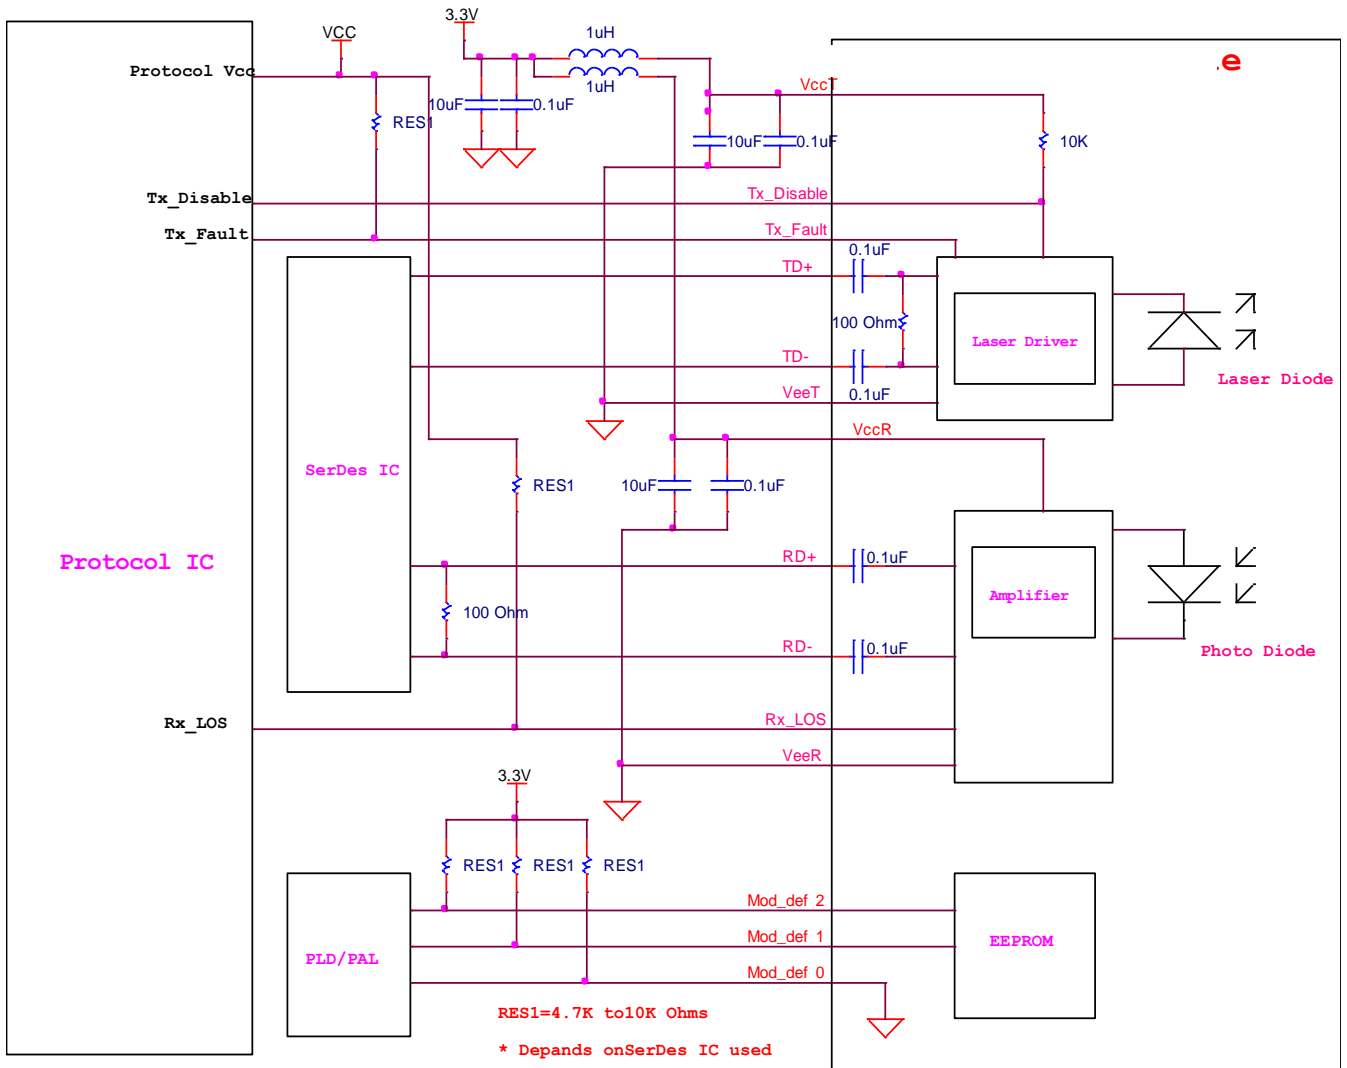

## Mechanical Specifications (Unit: mm)

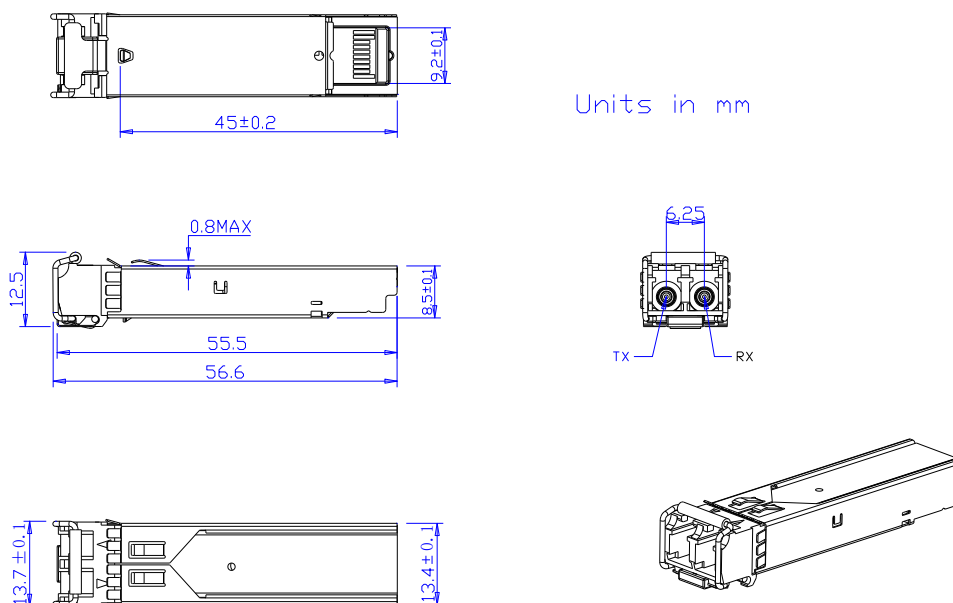

## SFP-1.25G-1550nm-80km-SM-LC-DDM

### Regulatory Compliance

| Feature                            | Reference  | Performance               |
|------------------------------------|--|---------------------------|
| Electrostatic discharge (ESD)      | IEC/EN 61000-4-2                                 | Compatible with standards |
| Electromagnetic Interference (EMI) | FCC Part 15 Class B EN 55022 Class B (CISPR 22A) | Compatible with standards |
| Laser Eye Safety                   | FDA 21CFR 1040.10, 1040.11 IEC/EN 60825-1, 2     | Class 1 laser product     |
| Component Recognition              | IEC/EN 60950 , UL                                | Compatible with standards |
| ROHS                               | 2002/95/EC                                       | Compatible with standards |
| EMC                                | EN61000-3  | Compatible with standards |



**37742627-071**

**37742628-071**

**37742169-071**

**09128436521 (business manager)**



**[www.fccc.ir](http://www.fccc.ir)**

**[info@fccc.ir](mailto:info@fccc.ir)**



**200 Danesh St., Koshesh Square,  
Danesh corner ,industrial city., Shiraz, iran  
Postal code 7158193914**

